

METHODS OF PERMAFROST STUDIES
SEISMIC STUDIES IN FROZEN GROUND

A.G. Skvortsov, A.M. Tsarev, M.R. Sadurtdinov

*Institute of Earth's Cryosphere, Siberian Branch of the Russian Academy of Sciences,
PO box 1230, Tyumen, 625000, Russia; agskvortsov@mail.ru*

The specificity of seismic soundings in frozen ground is defined by the features of the permafrost-related wavefield. According to years-long experience of the authors, shear-wave surveys with the use of the *SH* phase are an efficient tool to study unfrozen layers (taliks) above permafrost and the subsurface structure. Joint use of compressional and shear velocity data is workable in estimating the state and properties of frozen ground.

INTRODUCTION

The permafrost-related seismic wavefield, especially that of soft sediments, has a number of specific features. They result from the seismic and lithological heterogeneity of the section and its variations in space and time associated with seasonal temperature change and other factors. The wave patterns may bear prominent reflection contrasts and velocity reversals. Many sections comprise a shallow-lying thin layer with high seismic velocities. Such layers may be seasonally frozen ground, frozen coarse soil, or pavement (concrete or asphalt) within urban or industrial areas. These layers produce velocity reversals in the seismic section [Skvortsov, 2005] and cause the respective dramatic changes to the *SH* (horizontally polarized) shear-wave field. The geocryological seismic sections of this kind [Skvortsov, 1997] require special acquisition methods. The awareness of the permafrost specificity can make basis for the appropriate choice of techniques and is a prerequisite of their efficiency.

Seismic surveys in permafrost have many objectives [Melnikov *et al.*, 2010] that belong to three main groups: (i) estimating the depth to the permafrost table, (ii) imaging the section structure, and (iii) studying the state and properties of frozen ground.

ESTIMATING THE DEPTH
TO THE PERMAFROST TABLE

The depth to the permafrost table is estimated in the course of contouring natural and man-caused layers of unfrozen ground (taliks) and measuring their thickness, which may be tens of meters.

The problem is successfully resolved with refraction surveys commonly used in shallow seismic exploration in land conditions of a normal seismic section [Skvortsov, 1997]. However, *P*-wave refraction shooting is poorly applicable to permafrost sections because

some layers may remain unresolved [Tsarev *et al.*, 2010]. The missed layers, often a zone of full hydraulic saturation, introduce large errors (up to 40 % or more) to the estimates of talik thickness (Fig. 1, *a*). Higher resolution in this case can be achieved with *SH* refractions [Ponomareva and Skvortsov, 2006].

A still better alternative is to use a special technique of high-resolution shear-wave reflection (SWR) profiling with *SH* phases designed at the Institute of Earth's Cryosphere (Tyumen). The phenomenological background of the new method consists in dramatic changes of the *SH* wavefield in cases of velocity reversal [Skvortsov, 2005]. Thus the respective reflections from shallow (few meters) interfaces become recordable at certain favorable conditions [Snegirev *et al.*, 2003].

See Fig. 1 for some examples of refraction and SWR data used to predict the geometry and thickness of man-caused onshore taliks.

Studying inner-shelf taliks (shallow water, tidal zone) has gained ever more importance lately with the development of the Arctic shelf, but there were no appropriate acquisition methods till recently.

Research in this line has been run at the Institute of Earth's Cryosphere since 2006 [Skvortsov *et al.*, 2007a, b; Sadurtdinov *et al.*, 2009]. The shelf section was found out to bear a thick undersaturated layer below the ground surface in which water saturation of rocks is impeded by entrapped air. The layer thickness is highly variable and can reach 2 m or more. *P*-wave surveys are often inapplicable in this case as they can provide acceptable resolution only outside the tidal zone. As the available experience shows, the *P*-wave method has the same limitations also in lakes and rivers within or outside the permafrost zone.

On the other hand, *SH* surveys are workable in estimating the depth to the permafrost table under

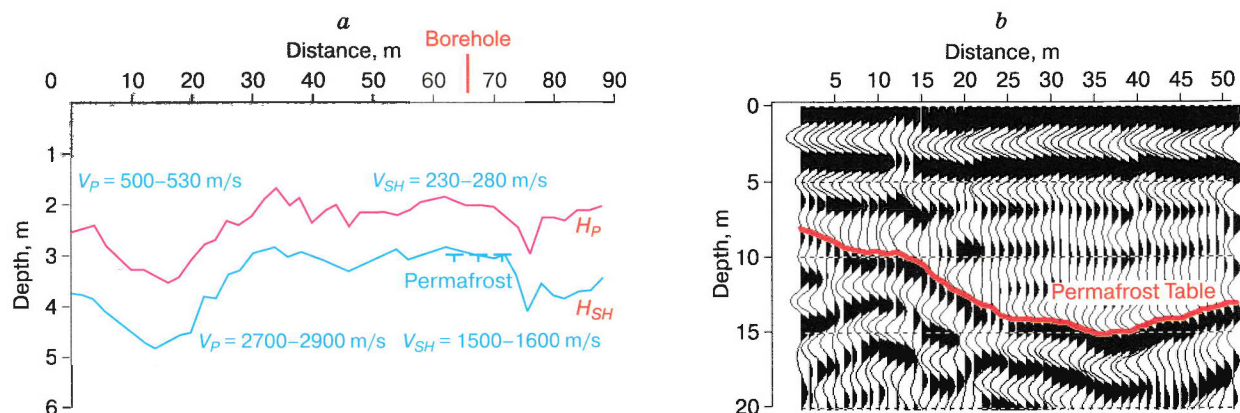


Fig. 1. Examples of contouring man-caused unfrozen layers with the use of refracted (a) and reflected (b) *SH* waves.

a: Mirnyi; b: Norilsk; H_P and H_{SH} are depths to permafrost surface estimated with compressional (*P*) and shear (*S*) waves, respectively; V_P and V_{SH} are compressional and shear (*SH*) wave velocities, respectively.

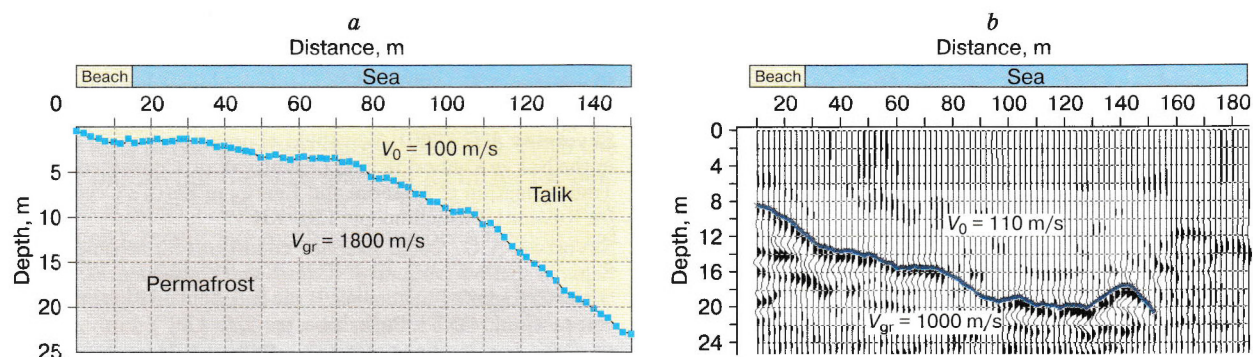


Fig. 2. Examples of contouring unfrozen layers in inner shelf with the use of refracted (a) and reflected (b) *SH* waves.

a: Yamal, Cape Kamennyi; b: Pechora mouth, Bolvansky site; V_0 is *SH* velocity in unfrozen layer; V_{gr} is interface *SH* velocity at permafrost surface.

shallow water. Shallow interfaces are resolvable with refracted waves (Fig. 2, a), but deeper taliks are better resolved with *SH* reflections (Fig. 2, b).

Special methods and technology of bottom surveys have been developed additionally for offshore survey.

IMAGING THE PERMAFROST SECTION

When sounding frozen ground, one has to bear in mind the specificity of its seismic section, namely, the presence of many prominent interfaces and velocity reversals, including those near the permafrost surface. In these conditions, refraction shooting is often difficult or impossible, and reflection surveys become a better choice [Malkova et al., 2008; Skvortsov et al., 1992, 2009], especially, *SH* reflections. The absence of converted waves make the *SH* wavefield simpler to provide more reliable seismic data [Skvortsov, 2001].

Summer acquisition in frozen ground faces difficulties associated with the active layer, especially if the thaw depth is multiple of the wavelength. In the

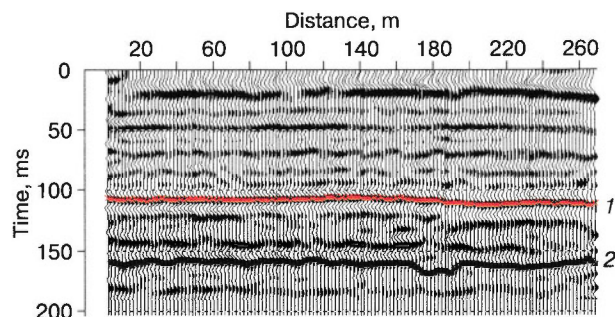


Fig. 3. A high-resolution SWR cross section near a kimberlite pipe in Yakutia.

1 – a reflection from Jurassic clay surface at depth about 55 m; 2 – Ordovician limestone surface at a depth of 80–90 m with a local low which may be a trap for placer diamond.

latter case, the wavefield bears intense reverberation multi-cycle waves [Skvortsov, 2002], and reflections from seismic interfaces within permafrost become ill resolvable. At shallow thaw depths, reflections are recordable if the source is placed on the permafrost surface [Skvortsov et al., 1992]. For this reason, it is preferable to image the structure of frozen ground in winter seasons to avoid thaw effects. Better results are obtained if land measurements with the SWR method are checked against downhole vertical seismic profiling (VSP) where possible.

Figure 3 presents an example permafrost section to a depth of 100 m collected with SWR profiling and checked against VSP data [Skvortsov, 2005].

STUDYING THE STATE AND PROPERTIES OF FROZEN GROUND

Compressional- and shear-wave velocity data have implications for elastic properties, strength, and strain of rocks, including frozen ground.

In the latter case, there is a separate problem of estimating the degree of permafrost "sluggishness", for which an approach based on Poisson's ratio patterns was suggested in [Melnikov et al., 2010].

Poisson's ratios in frozen sand-clay sediments at a low salinity of pore fluid are known to range between 0.25 and 0.40 depending on the grain-size composition but can reach 0.47–0.50 in water-saturated unfrozen sediments. Thus, Poisson's ratio can be a proxy of sluggishness associated with the amount of unfrozen water.

According to our results, joint analysis of velocity patterns and velocity ratios can provide reliable estimates of permafrost sluggishness. Therefore, the suggested approach is applicable to detect cryopegs (brine lenses) and zones of high-salinity pore fluid.

CONCLUSIONS

The choice of seismic acquisition methods and techniques should stem from knowledge of wavefield specificity within the study area.

Supra-permafrost unfrozen ground, including that under shallow water, is resolvable by *SH* refraction seismic surveys in the case of a normal velocity profile but *SH* reflections are more efficient in the presence of velocity reversals.

High-resolution shear-wave reflection (SWR) profiling with the use of *SH* phases is an advantageous tool for studying the structure of frozen ground.

Joint analysis of velocity patterns and velocity ratios (Poisson's ratio) is useful to estimate the elastic constants and the state of permafrost.

The study was supported by grants 08-05-00421a and 06-05-79071-k from the Russian Foundation for Basic Research and grants from the Tyumen Province Academy. It was carried out as part of Program 20 of the Russian Academy of Sciences, Program 11 of the

Earth's Science Department of RAS, and Program 122 of the Siberian Branch of the RAS.

References

- Malkova G.V., Skvortsov A.G., Sadurtdinov M.R., et al., 2008. Seismic surveys applied to study unfrozen ground in on-shore Pechora bay, in: Resources of Arctic and Highland Terrains. State and Prospects of Engineering-Geological Permafrost Studies. Proc. Intern. Conf. Tyumen, 21–24 April 2008 [in Russian]. Express, Tyumen, pp. 311–313.
- Melnikov V.P., Skvortsov A.G., Malkova G.V., et al., 2010. Seismic studies of frozen ground in Arctic areas. Russian Geology and Geophysics (Geologiya i Geofizika), 51 (1), 134–142 (169–177).
- Ponomareva O.E., Skvortsov A.G., 2006. Studies of surface geologic processes in Nadym district, West Siberia: Methods and results, in: Theory and Practice of Earth's Permafrost Appraisal. Proc. Intern. Conf. [in Russian]. Book 1. TGNU, Tyumen, pp. 272–274.
- Sadurtdinov M.R., Skvortsov A.G., Tsarev A.M., 2009. Shallow-water submarine seismic surveys of shallow subsurface, in: Geophysics for Engineering and Mineral Exploration. Proc. 5th Intern. Workshop, Gelendzhik (On-line version).
- Skvortsov A.G., 1997. Wave patterns in unconsolidated permafrost. Kriosfera Zemli, 1 (3), 66–72.
- Skvortsov A.G., 2001. Wavefield of upper permafrost section in the Nakyn kimberlite field (Yakutiya), in: Conservation and Transformation of Material and Energy in Earth's Cryosphere [in Russian]. Pushchino, pp. 130–131.
- Skvortsov A.G., 2002. Extreme conditions for seismic wavefields in shallow permafrost: Causes and consequences, in: Extreme Cryogenic Phenomena: Basic and Applied Aspects. Proc. Intern. Conf., ONTI, Pushchino, pp. 170–171.
- Skvortsov A.G., 2005. High-resolution shallow shear-wave seismic surveys, in: Engineering Geophysics, Proc. Intern. Conf., Moscow University Press, Moscow, pp. 16–18.
- Skvortsov A.G., Hunter J.A., Goriainov N.N., et al., 1992. High-resolution shear-wave reflection technique for permafrost engineering applications. New results from Siberia, in: Proc. 62nd Annual Intern. SEG Meeting, New Orleans, USA, pp. 382–383.
- Skvortsov A.G., Malkova G.V., Drozdov D.S., et al., 2007a. Seismic-cryological conditions in the Arctic inner shelf, in: Geophysics for Engineering and Mineral Exploration. Proc. 3rd Intern. Workshop, Gelendzhik, pp. 196–198.
- Skvortsov A.G., Malkova G.V., Sadurtdinov M.R., et al., 2007b. Cryological conditions of the inner shelf in the Pechora Bay (Bolvanskii site), from seismic data, in: Cryogenic Resources of Arctic Region. Proc. Intern. Conf., TyumGNGU, Salekhard, Book 1, pp. 170–173.
- Skvortsov A.G., Drozdov D.S., Malkova G.V., et al., 2009. Seismic-cryological conditions of petroleum provinces in northern Russia. Abstracts, Workshop Tyumen-2009 (On-line version).
- Snegirev A.M., Velikin S.A., Istratov V.A., et al., 2003. Geophysical monitoring in permafrost areas, in: Permafrost, Proc. 8th Intern. Conf., ICOP, Zurich, pp. 1079–1084.
- Tsarev A.M., Skvortsov A.G., Sadurtdinov M.R., 2010. An experience of permafrost engineering applications of seismic methods, in: Geophysics for Engineering and Mineral Exploration. Proc. 5th Intern. Workshop, Gelendzhik (On-line version).

Received
8 February 2011